



Pneumatic High Pressure Pumps Aero-MAX & Travel-MAX

For bolting jobs in areas where there is a risk of explosion or where there is no electric power supply ITH offers Pneumatic High Pressure Pumps „Aero-MAX“ in several types. Aero-MAX 9

and 10 are designed for shop applications while Aero-MAX 89 and 90 are made for service jobs because of their light-weight design and easy transport.

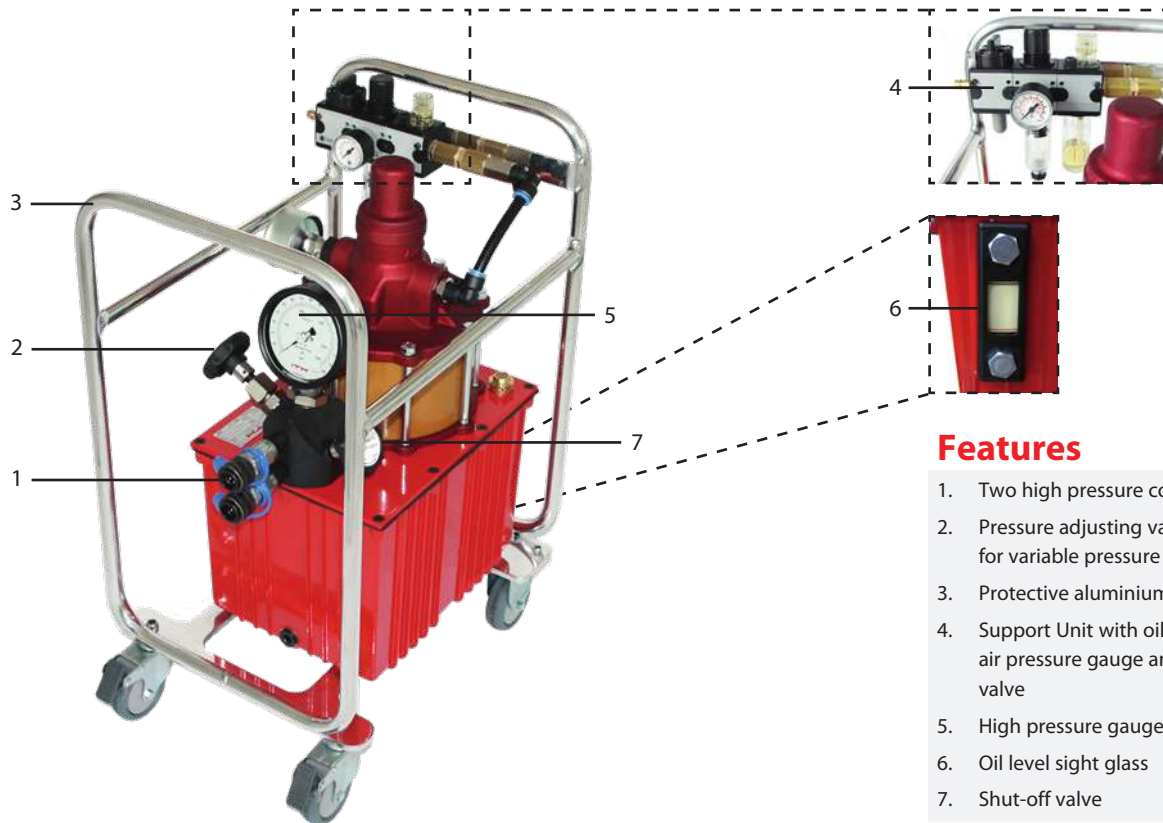


Fig.: Aero-MAX 9

Features

1. Two high pressure couplings
2. Pressure adjusting valve (PAV), for variable pressure adjusting
3. Protective aluminium frame
4. Support Unit with oiler, water filter, air pressure gauge and air shut off valve
5. High pressure gauge
6. Oil level sight glass
7. Shut-off valve

Performance

- ✓ Maximum Pressures up to 3.000 bar.
- ✓ No electric power supply required.
- ✓ Easy-to-service-design by optimized number of components, which leads to a reduction of maintenance costs.
- ✓ Easy transport.
- ✓ Movable and lockable wheels.
- ✓ Optional for Aero-MAX 179: Pneumatic remote.

Pneumatic Remote



Only for Aero-MAX 179: Remote (5m) with pneumatic shut-off valve (No electric power supply required)

Aero-MAX 9 - Shop-Version with PAV and Aero-MAX 10 – Shop version without PAV



Field of application:

- ✓ For shop applications
- ✓ Designed for high cycles

Order no.	34.x0009 / 34.x0010				
Type	0913 / 1013	0915 / 1015	0925 / 1025	1030	1040
Pressure max. [bar]	1.350	1.500	2.500	3.000	4.000
Min. air pressure [bar]	4.5	5.0	6.0	7.0	6.0
Air requirement	ca. 1400 l/min				
Dimension (LxWxH)	430 x 330 x 660mm				
Weight	35.0 kg				

Aero-MAX 89 - Mini-Version with PAV and Aero-MAX 90 – mini version without PAV



Field of application:

- ✓ For service and assembling jobs
- ✓ Light-weight design
- ✓ Easy transport

Order no.	34.x0089 / 34.x0090			
Type	8913 / 9013	8915 / 9015	8925 / 9025	9030
Pressure max. [bar]	1.350	1.500	2.500	3.000
Min. air pressure [bar]	5.0	5.5	6.0	7.0
Air requirement	ca. 900 l/min			
Dimension (LxWxH)	430 x 330 x 660mm			
Weight	21.0 kg			

Aero-MAX 179 - Shop-Version with pneumatic Remote



Field of application:

- ✓ For service and assembling jobs
- ✓ Light-weight design
- ✓ Easy transport
- ✓ Easy-to-use by pneumatic remote

Order no.	34.x0179			
Type	7913	7915	7925	7930
Pressure max. [bar]	1.350	1.500	2.500	3.000
Min. air pressure [bar]	6.0	6.0	6.0	7.0
Air requirement	ca. 1400 l/min			
Dimension (LxBxH)	430 x 400 x 660mm			
Weight	21.0 kg			

Travel-MAX 41



Field of application:

- ✓ For service and assembling jobs
- ✓ Compact and light weight design
- ✓ Easy to maintain
- ✓ Easy transport by case with trolley function

Order no.	34.x0041	
Type	4115	4125
Pressure max. [bar]	1.350	2.500
Min. air pressure [bar]	6.0	6.0
Air requirement	ca. 900 l/min	
Dimension (LxWxH)	500 x 305 x 457mm	
Weight	27.5 kg	